


正面



Smart Life

Thank you for using flood light

Basic Parameters


Product Name: Smart flood light
 Pixel: 2 MP/3MP
 Video compression: H.265 high profile
 Image enhancement: digital wide dynamic 3D noise reduction
 Local storage: Micro SD Card (MAX128G)
 Support platform: Android / IOS
 PIR distance: 4-8M
 Wireless encryption: WEP / WPA / WPA2
 Power input: AC100-240V 50 / 60Hz
 Power consumption : 25W ± 10%
 Wireless standard: 2.4G 802.11 B / g / n
 (double lamp) lighting distance: radius 5m

Component Description:
 Reset Button: Long press "reset" hole 5sec to reset

Recommend to put 16-128GB class10 Micro SD card, otherwise it will not be able to store, playback and support important functions such as firmware upgrading.


Install APP

- Scan the QR code below to download and install the APP
- Register and log in according to the prompts.




Add The Device-Scan QR code mode

- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "Smart Life" APP; press the "+" in the upper right corner of the main screen (Figure 01); choose "Security & Video Surveillance", click "Smart Camera" (Figure 02);

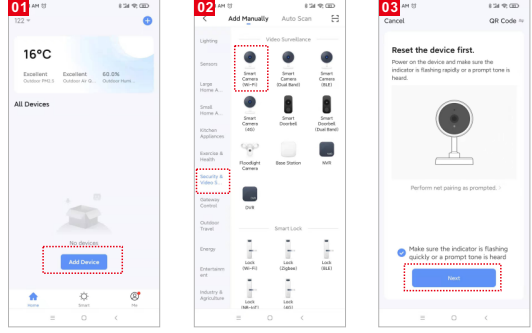


Please note that only 2.4 GHz Wi-Fi network is supported;


- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-Fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05);
- If the phone is connected to Wi-Fi (Figure 06);

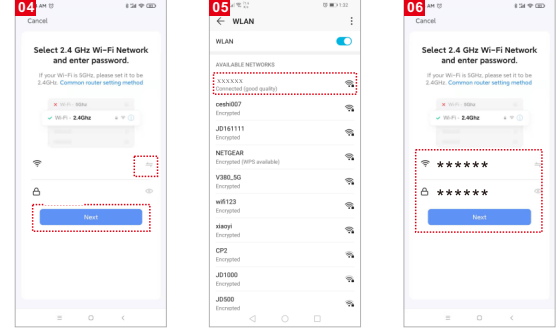

- A QR code will prompt on your screen and you need to scan it with the Smart Camera. (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure. 07).
- "connecting" (Figure. 08);

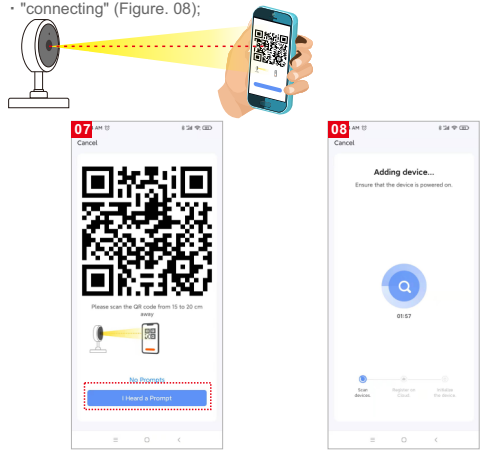


- connection completed(Figure 09), and click "Done";
- Then jump to preview interface (Figure 10)
- After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

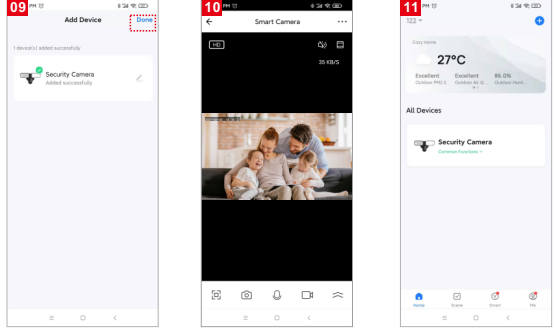


Add device-WIFI fast connection mode

- Select "AP Mode" (Figure 12)
- Click Next (Figure 13)
- Enter the account and password that can connect to WIFI (Figure 14)

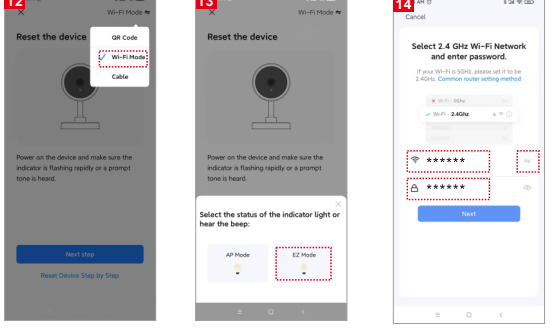

- Click + and click again to complete the connection (Figure 15)
- Video screen (Picture 16)

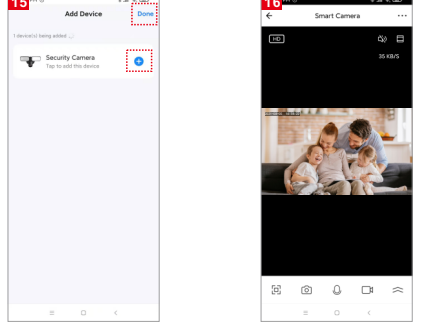

Matters Need Attention

Try to keep away from the metal space;
 Avoid the furniture, microwave oven blocked;
 Avoid the space where the audio, video and data lines are around, and keep the space away from them as large as possible;
 Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment:
 In the new network environment, please press the reset hole about 5 seconds, then connect to the network.

The name and content of the harmful substances in the product

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

Maintenance records: _____

Maintenance time: _____

Fault conditions: _____

Fault cause: _____

Troubleshooting: _____

Return and exchange proof: _____

Date of validity: _____

Original device ID: _____

New device ID: _____

maintenance personnel signature: _____

Maintenance Department seal: _____


80x80mm
 折叠式
 128g铜版纸

背面

Installation Diagram Of American Standard

- Black: live wire (L)
- White: zero wire (N)
- Yellow + Green: ground wire (E)


Warning: Please operate in case of power failure during installation, and correctly connect (live wire, neutral wire, ground wire) to avoid short circuit (power input: AC100-240V) caused by wrong connection, please pay attention to safety.

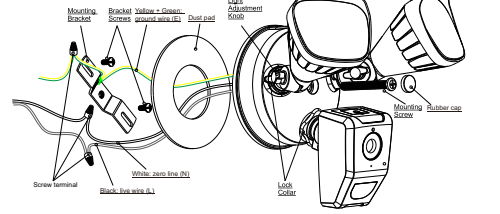

The picture only provides the reference assembly sequence (the actual one shall prevail)

US packaging list


Package list: Smart flood light x1, instruction x1, Bracket / screw X1, dust pad x1, Rubber cap package x1, screw package x1, screw terminal package x1

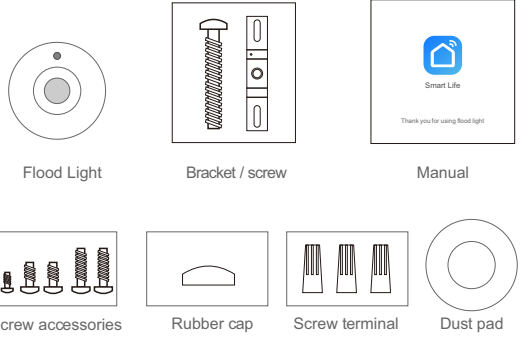

(the above accessories are only provided with US Standard)


Bracket installation

- There is a junction box on the wall
- Mounting brackets

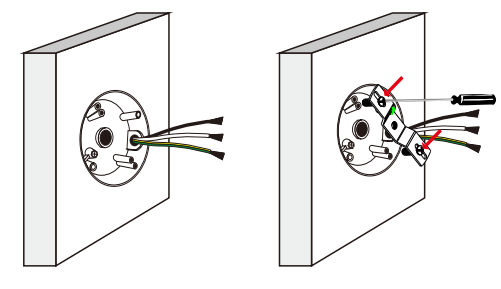


The dustproof pad is attached to the bottom of the product

- bottom position of the product
- Ground wire

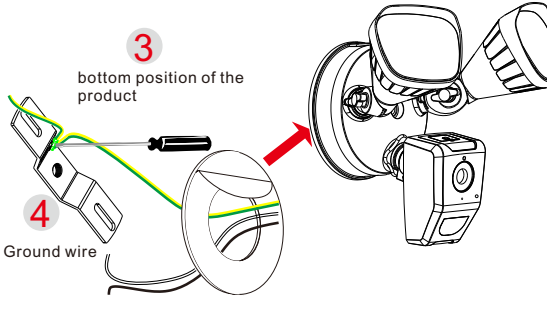


Power cord connection diagram

- Firewire + Firewire connection
- Tighten the two wires
- Nut + power cord (rotate and tighten)

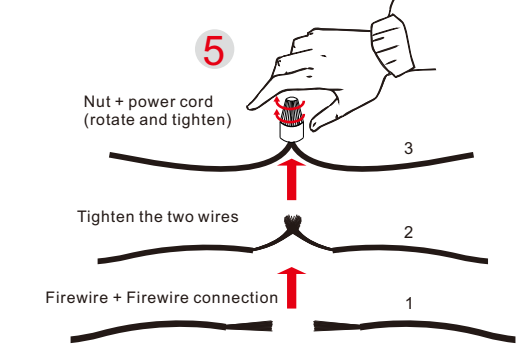


Tighten the screw

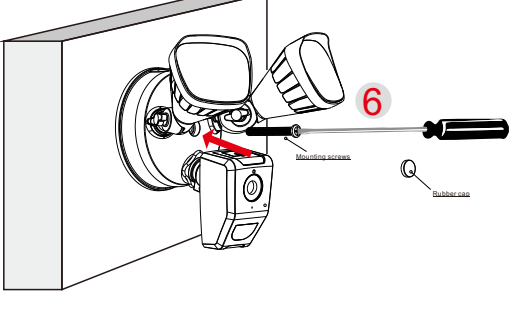

Installation Diagram Of Australian / European Standard Gauge

- Brown: live wire (L)
- Blue: Zero wire (N)
- Yellow + Green: ground wire (E)


Warning: Please operate in case of power failure during installation, and correctly connect (live wire, neutral wire, ground wire) to avoid short circuit (power input: AC100-240V) caused by wrong connection, please pay attention to safety.

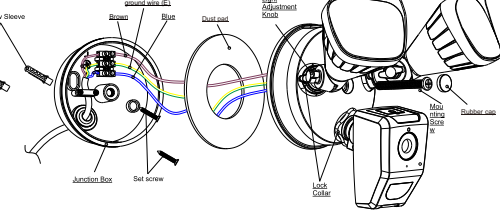

The picture only provides the reference assembly sequence (the actual one shall prevail)

Packing List Of Australian / European Standards


Package list: Smart flood light x1, instruction x1, screw accessories package x1, dust pad x1, junction box x1

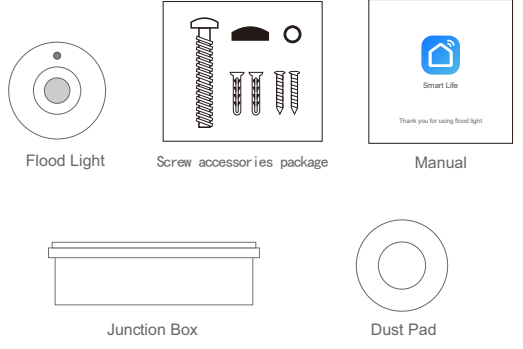

(the above accessories are only provided with AU / EU standards)


Steps for wall mounting junction box

- Installation of junction box
- Installation of junction box
- Installation of junction box

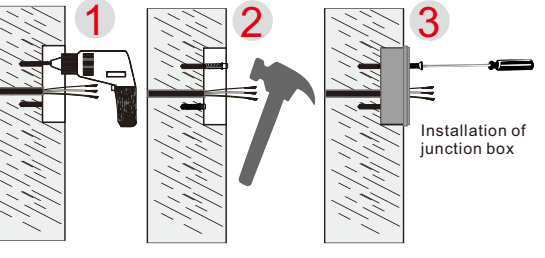


The dustproof pad is attached to the bottom of the product

- bottom position of the product

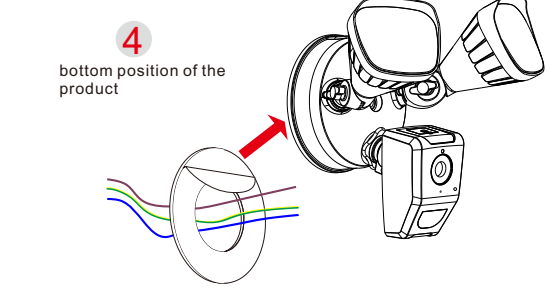

Power cord connection diagram

- Tighten the screws
- Tighten the screws
- Tighten the screws

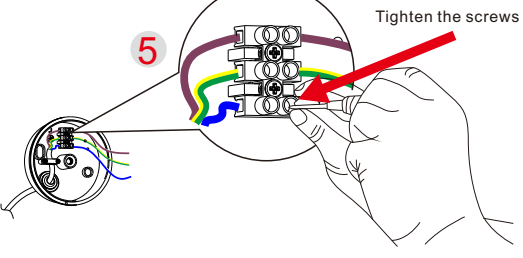

Tighten the screw

